

**AUTOMATIC CONTROL ROOM TEMPERATURE USING PIC WITH LCD
DISPLAY**

HAFIZ BIN NAZAR

UNIVERSITI TEKNIKAL MALAYSIA MELAKA

**AUTOMATIC CONTROL ROOM TEMPERATURE USING PIC WITH LCD
DISPLAY**

HAFIZ BIN NAZAR

**This report is submitted in partial fulfillment of the requirements for the award
of Bachelor of Electronic Engineering (Industrial Electronics) With Honours**

**Faculty of Electronic and Computer Engineering
Universiti Teknikal Malaysia Melaka**



UNIVERSITI TEKNIKAL MALAYSIA MELAKA
FAKULTI KEJURUTERAAN ELEKTRONIK DAN KEJURUTERAAN KOMPUTER

**BORANG PENGESAHAN STATUS LAPORAN
PROJEK SARJANA MUDA II**

**Tajuk Projek : AUTOMATIC CONTROL ROOM TEMPERATURE USING
PIC WITH LCD DISPLAY**

Sesi Pengajian : 2005/09

Saya**HAFIZ BIN NAZAR**.....
(HURUF BESAR)

mengaku membenarkan Laporan Projek Sarjana Muda ini disimpan di Perpustakaan dengan syarat-syarat kegunaan seperti berikut:

1. Laporan adalah hakmilik Universiti Teknikal Malaysia Melaka.
2. Perpustakaan dibenarkan membuat salinan untuk tujuan pengajian sahaja.
3. Perpustakaan dibenarkan membuat salinan laporan ini sebagai bahan pertukaran antara institusi pengajian tinggi.
4. Sila tandakan () :

SULIT*

(Mengandungi maklumat yang berdarjah keselamatan atau kepentingan Malaysia seperti yang termaktub di dalam AKTA RAHSIA RASMI 1972)

TERHAD*

(Mengandungi maklumat terhad yang telah ditentukan oleh organisasi/badan di mana penyelidikan dijalankan)

TIDAK TERHAD

Disahkan oleh:

(TANDATANGAN PENULIS)

(COP DAN TANDATANGAN PENYELIA)

Alamat : Pos 45, Kg. Tengah Lubok,
Semerah, 83600, Batu Pahat,
Johor Darul Takzim

Tarikh: 30 April 2009

Tarikh:

“I hereby declare that this report is the result of my own work except for quotes as
cited in the reference”

Signature :

Author : HAFIZ BIN NAZAR

Date : 30th April 2009

“I hereby declare that I have read this report and in my opinion this report is sufficient in terms scope and quality for the award of Bachelor of Electronic Engineering (Industrial Electronics) With Honours”

Signature :
Name : MR MOHD. RIDUAN BIN AHMAD
Date :

Special dedication to my beloved father and mom, my entire sibling and my kind hearted supervisor Madam Niza Bt. Mohd Idris , my new supervisor Mr. Mohd. Riduan B. Ahmad, and all my dearest friends.

ACKNOWLEDGEMENTS

Firstly, a very grateful to Allah for his blessing me for this report completion. I would like to extend my sincere gratitude to my previous supervisor, Madam Niza Bt. Mohd Idris, for her assistance and guidance toward the progress of this thesis project. Through one semester, Madam Niza has been patiently monitoring my progress and guided me in the right direction and offering encouragement. Obviously the progress I had now will be uncertain without her assistance. Likewise, I like to appreciate to Mr. Mohd. Riduan B. Ahmad, for his encouragement as my new supervisor. My special appreciation and thank to my entire friend Lokman and Fadli for their invaluable assistances towards this thesis project. I also would like to thank to my family especially to my parents, without their support and understanding this would not have been possible.

ABSTRACT

Nowadays, the changing of temperature in Malaysia is unpredictable. However, the usage of product such as fan and air conditioner are not enough to solve this problem because of the operation of the product are manually. Because of that, an automatic product of fan is build. The product is an inexpensive and also gives comfortable to the user. The product is operates automatically based on the changing of room temperature. For the detection of room temperature, a temperature sensor (type: LM35DZ) is used. The temperature sensor will sends signal to microcontroller (model: PIC16F876A) and microcontroller will determine to increase or decrease the speed of the fan based on the received signal from temperature sensor.

ABSTRAK

Perubahan suhu yang berlaku di Malaysia sentiasa tidak menentu. Namun, penggunaan produk seperti kipas dan penghawa dingin kurang mampu menyelesaikan masalah ini kerana ia beroperasi secara manual. Oleh itu, satu produk kipas automatik dibina untuk mengatasi masalah ini. Bukan sahaja murah malah teknologi ini perlulah berkualiti dan mampu memenuhi kehendak dan keselesaan setiap pelanggan. Produk kipas ini beroperasi secara automatik berdasarkan kepada perubahan suhu bilik. Untuk mengesan perubahan suhu bilik, pengesan suhu (jenis: LM35DZ) digunakan. Pengesan suhu ini akan menghantar isyarat pada mikropengawal (model: PIC16F876A) dan mikropengawal akan menentukan tahap kelajuan kipas samaada lebih tinggi, sederhana dan laju berdasarkan isyarat yang diterima daripada pengesan suhu.

CONTENTS

CHAP	TITLE	PAGES
	PROJECT TITLE	i
	DECLARATION FORM	ii
	DECLARATION	iii
	SUPERVISOR DECLARATION	iv
	DEDICATION	v
	ACKNOWLEDGEMENT	vi
	ABSTRACT	vii
	ABSTRAK	viii
	CONTENT	ix
	TABLE LIST	xiii
	FIGURE LIST	xiv
	ABBREVIATIONS LIST	xvi
	APPENDIX LIST	xvii
I	INTRODUCTION	
	1.1 Project Background	1
	1.2 Project Objective	1
	1.3 Problem Statement	2
	1.4 Scope of Work	2
II	LITERATURE REVIEW	
	2.1 Introduction	3

II LITERATURE REVIEW

2.2	Reference Circuit 1	4
2.3	Reference Circuit 2	6
2.4	Reference Circuit 3	8
2.5	Reference Circuit 4	9
2.6	Reference Circuit for PSM Project	11
2.7	Microcontroller	13
2.7.1	Memory	13
2.8	Introduction to PIC Microcontroller	14
2.9	Temperature Sensor (LM35DZ)	16

III PROJECT METHODOLOGY

3.1	Flow Chart Methodology	18
3.2	Identify the Title	21
3.3	Searches for Information	21
3.4	Understanding Basic Matter of Project	21
3.5	Identify the Circuits and Buy Electronic Components	21
3.6	Develop Program for PIC	22
3.6.1	MPLAB IDE Compiler	23
3.7	Circuit Simulation and PCB Design by Proteus 7 Professional	25
3.8	Circuit Construction on Breadboard	27
3.9	Circuit Construction on PCB and Integration to Prototype	27

IV PROJECT'S CIRCUIT OPERATION

4.1	General Description	29
4.2	Temperature Sensor (LM35)	31

4.3	Power Transistor (BD135)	31
4.4	PIC16F876A (Microcontroller)	32
4.5	Interface PIC16F876A with Temperature Sensor (LM35)	33
4.6	Interface PIC16F876A with LCD (2X16 character)	34
4.7	Power Supply for Circuit	35
4.8	ICSP for Programming PIC Microcontroller	36
IV	PROJECT'S CIRCUIT OPERATION	
4.9	Push Button as Input for PIC microcontroller	37
4.10	LED as Output for PIC Microcontroller	37
4.11	Interface PIC16F876A with DC Brushless Fan	38
4.12	Software / Source Code	38
V	RESULT	
5.1	Expected result	40
5.2	Obtained Result	40
	5.2.1 Software Result	41
	5.2.2 Hardware Result	44
VI	DISCUSSION	
6.1	Hardware Development	49
6.2	Software Programming	50
VII	CONCLUSION AND RECOMMENDATION	
7.1	Conclusion	50
7.2	Recommendation	51

REFERENCES	52
-------------------	----

APPENDICES	53
-------------------	----

TABLE LIST

TABLE	TITLE	PAGES
2.1	Component list for the circuit	4
4.1	Pin description regarding to Figure 4.5	32
4.2	LCD connection pin	34

FIGURE LIST

FIGURE	TITLE	PAGES
2.1	Temperature Controlled Auto Fan [1]	4
2.2	Automatic Temperature Controlled Fan	6
2.3	Temperature Monitoring Control System	8
2.4	Automatic Temperature Controlled Fan	9
2.5	Automatic Temperature Controlled Fan	11
2.6	PIC burner	15
2.7	PIC16F876A	16
2.8	LM35DZ schematic diagram	16
3.1	Flowchart of project methodology	19
3.2	Continue from flowchart of project methodology	20
3.3	Several components that related to circuit project	22
3.4	Process of communication between man and a PIC	23
3.5	MP LAB IDE Desktop	24
3.6	Circuit design with the ISIS 7 Professional	26
3.7	PCB Design with ARES 7 Professional	26
3.8	Circuit Construction on Breadboard	27
3.9	Complete Prototype	28
4.1	Block diagram for the circuit	30
4.2	Circuit Diagram	30
4.3	Connection for LM35	31
4.4	Pin position for LM35	31
4.5	Pin position for BD 135	32
4.6	PIC16F876A	33

FIGURE	TITLE	PAGES
4.7	LCD (2X16 character)	34
4.8	Schematic of the LCD display	35
4.9	Power supply circuit	36
4.10	ICSP connection	37
4.11	Push button connection	38
4.12	LED connection	39
4.13	Flow chart of circuit operation	39
5.1	Programming in MPLAB IDE	41
5.2	Error Message at Build Output Window	42
5.4	HEX Machine Code	43
5.5	Initial Result for the Simulation	43
5.6	Final Result for the Simulation	44
5.7	Initial Condition	45
5.8	Fan A and LED A Activated	45
5.9	Strobe Light and LED B activated	46
5.10	Fan A, LED A, Strobe Light and LED B Activated	46
5.11	Fan A, LED A, Strobe Light and LED B Dectivated	47
6.0	Modification On the Source Code	49

LIST OF ABBREVIATIONS

PCB	-	Printed Circuit Board
NTC	-	Negative Temperature Coefficient
AC	-	Alternate Current (Arus Ulang Alik)
IC	-	Integrated Circuit
DC	-	Direct Current (Arus Terus)
LED	-	Light Emitting Diode
SCR	-	Silicon Controlled Rectifier
ADC	-	Analog Digital Converter
PIC	-	Programmable Interface Circuit
PSM	-	Projek Sarjana Muda

APPENDIX LIST

APPENDIX	TITLE	PAGES
A	PIC16F876A Data sheet	54
B	LM35DZ temperature sensor Data sheet	58
C	COMPONENTS PRICE ESTIMATION	61
D	Source Code	62
E	Gantt Chart	70

CHAPTER I

INTRODUCTION

1.1 PROJECT BACKGROUND

Room temperature (also referred to as **ambient temperature**) is a common term to denote a certain temperature within enclosed space at which humans are accustomed. Room temperature is thus often indicated by general human comfort, with the common range of 22°C (71.6 °F) to 28°C (82.4 °F), though climate may acclimatize people to higher or lower temperatures. For human comfort, desirable room temperature greatly depends on individual needs and various other factors. Because of changing effect of temperature, an automatic control room temperature is needed to solve the problem of uncomfortable for human life.

1.2 PROJECT OBJECTIVES

Due to the problem statement stated above, it's cleared that the objectives of the project is:

1. To built an accurate and sensitive circuit to control the room's temperature according to any changes of temperature. The suitable reference temperature is in the range of 22°C to 28°C.

2. To design a smart and intelligent system of automatic control room temperature which will display the temperature value and speed of fan at LCD display.

1.3 PROBLEM STATEMENTS

Room temperature always changes and sometimes it occurs drastically (for example: rainy day at the night). Thus, uncomfortable environment will be happen to the human life. Secondly, human aided control are commonly use but in certain time there are some unexpected matter occur. For this reason, automatic control system is needed. Another that the circuit of automatic control room temperature previously is less stable and less sensitive. Thus the measurement temperature of the circuit is also not accurate.

1.4 SCOPES OF WORK

This project will focus on controlling temperature changing inside a room and speed changing for the fan. Temperature sensor and microcontroller are the main components to execute the task. Thus, the function and operation of temperature sensor (type: LM35DZ) and microcontroller PIC16F876A will be study to accomplish this project. Four conditions of temperature had chosen to implement in this project. A signal from the input (temperature sensor) will be sent to microcontroller and microcontroller will be sent back the action signal to increase or decrease the fan's speed according to the temperature. In order to relate the hardware (temperature sensor and microcontroller) with the software, the understanding of source code that will be create using C compiler like MikroC or MPLAB IDE/PICC-Lite is also important. The function of the compiler is to translate C language commands to HEX machine code.

CHAPTER II

LITERATURE REVIEW

2.1 Introduction

Literature Review is important in each project as a base for gathering information necessary to complete the project. All information is gathered from various sources such as:-

1. Journal
2. Books
3. Conference Transcript
4. Thesis
5. Patent
6. Website

After searching through all this various material, all information will be filtered to be related to automatic controlled room temperature. The information that will be focused on this chapter is about some reference circuit of automatic controlled room temperature and its main components that to be used.

2.2 Reference Circuit 1

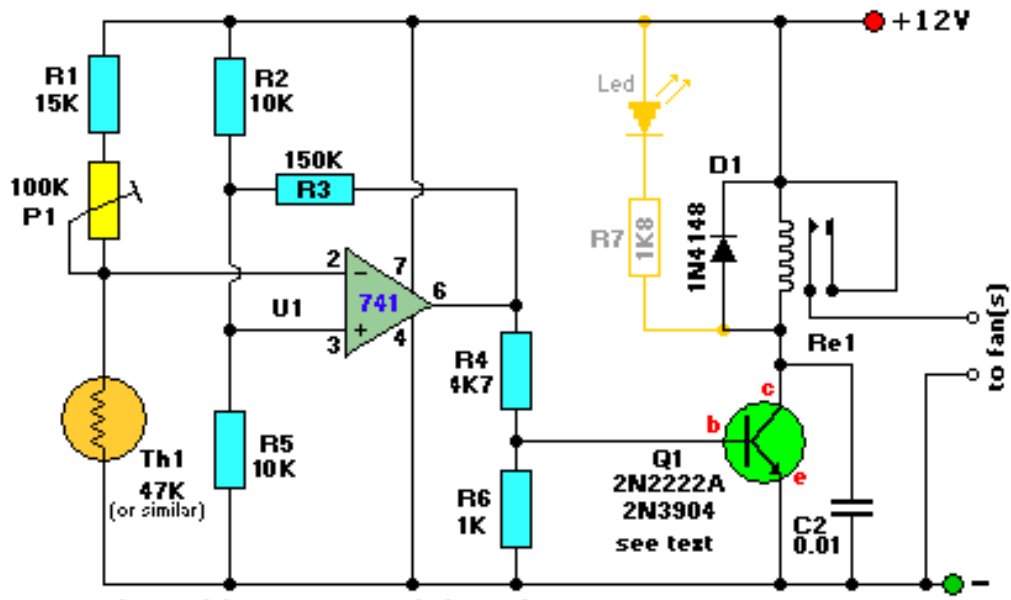


Figure 2.1 Temperature Controlled Auto Fan [1]

Part	Description	Notes
IC1	LM741 Op-Amp	NE741, μ A741, etc.
Q1	2N2222A transistor	See text
D1	1N4148 Diode	1N4001, or others
Th1	50K Thermistor	KC005T in prototype
Re1	12V Relay	RS is 1A
R1	15K, 5% resistor	brown-green-orange
R2,R5	10K, 5% resistor	brown-black-orange
R3	150K, 5% resistor	brown-green-yellow
R4	4K7, 5% resistor	yellow-purple-red
R6	1K, 5% resistor	brown-black-red
R7	1K8, 5% resistor	brown-gray-red
P1	100K Trimmer Pot	Bourns
C1	10uF/25V Capacitor	Electrolytic
C2	0.01uF, Capacitor	Ceramic
Led	Red, 3mm	Light Emitting Diode

Table 2.1 Component list for the circuit

Figure 2.1 show a circuit of Temperature Controlled Auto Fan design by Tony Van Roon [1]. This circuit uses one temperature sensor, thermistor 48K made by Fenwal (#197-503LAG-A01). This 48K was measured at exactly 25°C and with 10% tolerance. The resistance increases as the surrounding temperature decreases. Another name for this thermistor is 'NTC'. NTC stands for "Negative Temperature Coefficient" which means when the surrounding temperature decreases the resistance of this thermistor will increase. P1 is a regular Bourns trimmer and adjusts a wide range of temperatures for this circuit. R1 is a 'security' resistor just in case the trimmer pot P1 is adjusted all the way to '0' ohms. At which time the thermistor would get the full 12 volt and it will get too hot [1].

The function of R3 is to feeds a bit of hysteresis back into the op-amp to eliminate relay 'chatter' when the temperature of the thermistor reaches its threshold point. Depending on which application and the type to use for Q1 and Re1, start with 330K or so and the value is adjusted it's downwards until it satisfied. The value of 150K shown in the diagram worked for this circuit. Decreasing the value of R2 means more hysteresis, just don't use more then necessary. Or temporarily use a trimmer pot and read off the value. In this case 120K is suitable fot this circuit. Transistor Q1 can be a 2N2222(A), 2N3904, NTE123A, and ECG123A. Not critical at all. It acts only as a switch for the relay so almost any type will work, as long as it can provide the current needed to activate the relay's coil [1].

For the diode, D1 the 1N4148, acts as a spark arrestor when the contacts of the relay open and eliminates false triggering. For this application the 1N4148 was good enough since the tiny relay that had used was only 1 amp. However, the large variety of diodes can be as next choice for example 1N4001 or something and should be used if your relay type can handle more then 1 amp. This circuit was designed to automatically activate a set of three or four small DC fans to cool a large cool-rib for a 10 Amp power supply. It can be used in a variety of other applications as well [1].

2.3 Reference Circuit 2

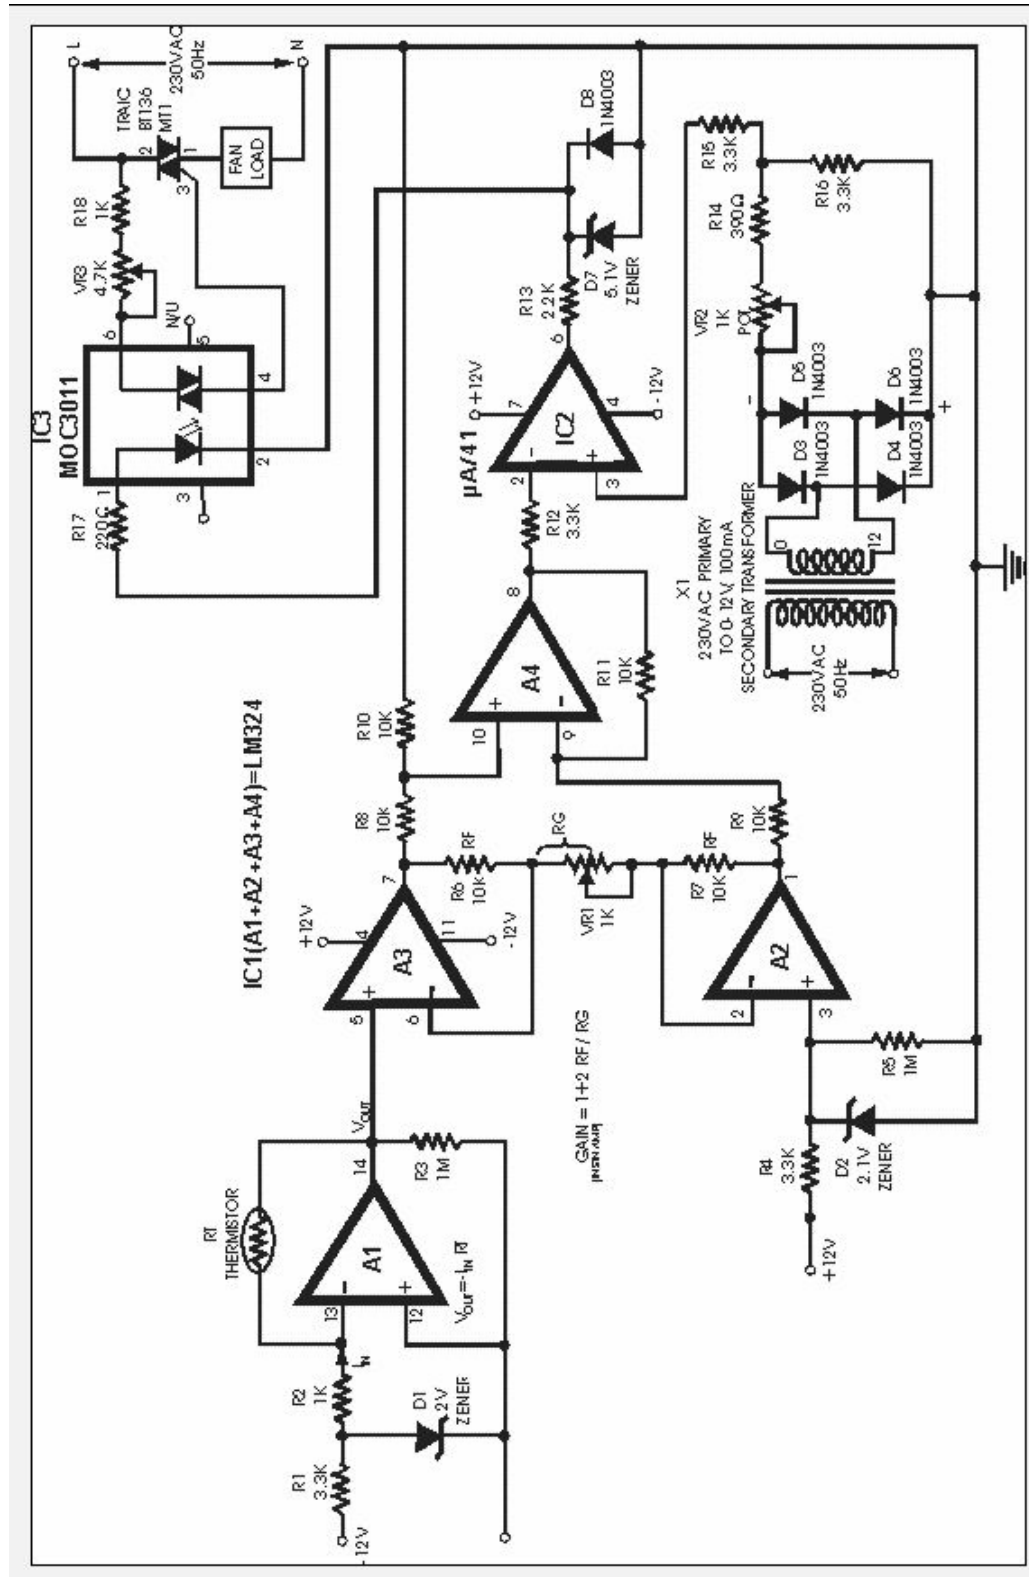


Figure 2.2 Automatic Temperature Controlled Fan