

**DECLARATION
BY
SUPERVISOR**

I hereby, declare I had read through this thesis entitled “Conceptual Design of Thermoelectric Power Generator (TEG) for Automotive Waste Heat Recovery” and I agree that this thesis had fulfilled the quality and scopes that worth it to award Degree of Mechanical Engineering (Thermal-Fluid).

Signature

: 

Supervisor's Name

: MOHAMAD FIRDAUS B. SUKRI

Date

: 15/05/2009

ENCIK MOHAMAD FIRDAUS B. SUKRI

Lecturer

Faculty of Mechanical Engineering
Universiti Teknikal Malaysia Melaka
Locked Bag 1200, Ayer Keroh
75450 Melaka

**CONCEPTUAL DESIGN OF THERMOELECTRIC
POWER GENERATOR (TEG) FOR AUTOMOTIVE
WASTE HEAT RECOVERY**

WONG JIAN HUA

Thesis submitted in accordance with the requirements of the Universiti
Teknikal Malaysia Melaka for the degree of Bachelor of Engineering
Mechanical (Thermal-Fluid)

Faculty of Mechanical Engineering
Universiti Teknikal Malaysia Melaka

May 2009

DECLARATION

I hereby, declare this thesis entitled “Conceptual Design of Thermoelectric Power Generator (TEG) for Automotive Waste Heat Recovery” is the results of my own research except as cited in the reference.

Signature :
Author's Name : ..WONG JIAN HUA..
Date : ..15.5.109.....

DEDICATION

For my beloved family,

ACKNOWLEDGEMENT

I would like to express my appreciation to all those who gave me the support to complete this thesis. I have to thank my supervisor Mr. Mohamad Firdaus Bin Sukri, for his valuable suggestions and encouragement.

I am very appreciated and grateful to Mr. Khalid M. S., a Mechanical Engineering researcher from the department of Thermal Fluid of University of Technology Malaysia, who give me the idea to do research on recovery waste heat from radiator using thermoelectric generator. He also inspired me, provides useful information and guides me in the thermoelectric field.

Especially, I would like to give my special thanks to Miss Farhana Binti Mohd Foudzi who gives me unconditional support to enable me to complete this work. Also I not forget to thanks Aunty Umi Kholtom for her understanding and encouragement.

Finally, I want to thank my family and friends for all their support and love.

ABSTRAK

Projek ini bertujuan untuk menghasilkan satu reka bentuk konseptual Penjana Kuasa Thermoelektrik (PKT) untuk sistem penyejukan automotif. PKT telah memainkan peranan yang penting dalam menukar haba buangan kepada tenaga elektrik. Dalam projek penyelidikan ini, hanya kaedah mekanikal pemasangan PKT difokuskan. Radiator daripada sistem penyejukan automotif telah dipilih untuk mengintegrasikan PKT kerana ia boleh menyediakan satu perbezaan suhu yang konsisten. Kerja-kerja penyelidikan PKT yang sebelum ini dikaji bagi menentukan keadaan optimum untuk reka bentuk radiator baru. Tenaga elektrik secara teori yang dihasilkan oleh PKT ditentukan menggunakan Konduksi Haba Hukum Fourier. Kemudian kerja penyelidikan diteruskan untuk mencari jalan penyelesaian menerusi mereka bentuk satu system yang mengintegrasikan PKT pada radiator yang diubahsuai. Sebanyak 40 modul dipasang pada radiator untuk menghasilkan 76.6 W tenaga elektrik. Kuasa keluaran reka bentuk PKT bergantung kepada angka merit bahan PKT.

ABSTRACT

This project aimed to produce a conceptual design of Thermoelectric Power Generator (TEG) for automotive cooling system. TEG has played an important role to convert the waste heat into useful electrical power. In this research project, only the method to assemble mechanical part of the TEG is focused. The radiator from the cooling system of automotive is selected to integrate TEG because it can provide a consistent temperature. Previous research works were study to determine the optimum condition for new radiator design. The theoretical electrical power produce by the TEG is calculated using the Fourier's Law of Heat Conduction. Then the research work continues on finding solution through design a system to integrate TEG into the modified radiator. The modified radiator has totally 40 modules build on it which can produce 76.6 W of electrical power. The output power of the design TEG system can be improve when the TEG material's merit of figure increased.

TABLE OF CONTENTS

CHAP	TITLE	PAGE NO.
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	<i>ABSTRAK</i>	v
	ABSTRACT	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xi
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xiv
	LIST OF SYMBOLS	xv
	LIST OF APPENDICES	xvi
CHAP 1	INTRODUCTION	1
	1.1 Problem Statement	1
	1.2 Background	3
	1.3 Objective	4
	1.4 Scopes	5
	1.5 Summary of Thesis	5
CHAP 2	LITERATURES REVIEW	6
	2.1 Waste Heat Recovery	6
	2.2 Automotive Thermoelectric Generators	7
	2.2.1 Hot-side Heat Exchanger	7
	2.2.2 Cold-side Heat Exchanger	7
	2.2.3 Thermoelectric Materials	8

2.3	Development of Exhaust-based ATEG	8
2.4	Efficiency of ATEG	10
2.5	Challenges in the Thermal Design of TEG System	10
2.6	Thermoelectric Materials Developments	11
2.6.1	Quantum Well Superlattice	12
2.6.2	Quantum Dot Superlattice	13
2.6.3	Superlattice	13
2.6.4	'Natural' Nanadots	14
2.6.5	Fine Grain	15
2.6.6	Nanowire	15
2.6.7	Summary of Materials Developments	17
2.7	TEG Integrate in Radiator Design	17
2.8	Advantages and Disadvantages of Thermoelectric Technology	18
2.9	Cooling System	19
2.9.1	Working Principle of Cooling System	20
2.9.2	Thermostat	20
2.9.3	Coolant	21
2.10	Radiator	21
2.10.1	Radiator Construction Material	22
2.10.2	Challenge in Radiator Design	22
2.10.3	Performance Radiator	22
2.11	Radiator Measurement	23
2.11.1	Radiator Core Height	23
2.11.2	Radiator Core Width	24
2.11.3	Radiator Core Depth	24
2.11.4	Radiator Header Depth	24
2.11.5	Radiator Header Length	24
2.12	Analysis Radiator Performance	25
2.12.1	Determine the relationship between the Engine Speed and the Mass Flow Rate	26
2.12.2	Determine the Relationship between the Engine Speed and the Temperature Drop across the Tube	26

2.12.3	Determine the Heat Dissipated Rate from the Mass Flow Rate and the Temperature Drop	27
2.12.4	The Radiator Heat Dissipation Result	27
2.12.5	Radiator Parameters Graphs	28
2.12.6	Conclusion	28
CHAP 3	METHODOLOGY	29
3.1	Introduction to Research Project	29
3.2	Literature Review	29
3.3	Methodology	29
3.4	Module Selection and Design of Radiator	33
3.5	Analysis Radiator Performance to Find the Optimum Conditions for the radiator	33
3.5.1	Heat Dissipated by One Tube	33
3.5.2	Heat Conduct through One Tube	34
3.5.3	Heat Conduct through Module	34
3.5.4	Determine the Require Number of Tube	35
3.5.5	Determine Actual Efficiency of Module from Graph	35
3.5.6	Determine Power Produced by Module from Graph	36
3.6	Radiator based TEG system Design	36
3.7	Discussion	37
3.8	Report Preparation	37
3.9	Presentation	37
CHAP 4	TEG MODULE SELECTION AND RADIATOR DESIGN	38
4.1	Module Selection	38
4.2	Radiator Design	39
4.2.1	Material for Radiator	39
4.2.2	Shape for the Radiator Tubes	40
4.2.3	New Radiator Specification	40

4.2.4	Number of Tube	41
4.2.5	Radiator Inlet Diameter	43
4.2.6	The Performance of New Design TEG System	41
4.2.7	Analysis Effect of the Size of the TEG module	49
4.3	Conclusion	53
CHAP 5	RADIATOR BASED TEG SYSTEM DESIGN	54
5.1	TEG Module	54
5.2	Fins	55
5.3	Radiator	57
5.4	Clamps	58
5.5	Assembly of the Components	62
CHAP 6	DISCUSSIONS	64
6.1	Material	64
6.2	Performance of TEG	65
6.3	Radiator Design	67
6.4	Applicable of the New Design TEG System	68
CHAP 7	CONCLUSION AND RECOMMENDATION	69
7.1	Conclusion	69
7.2	Recommendation	70
	REFERENCES	71
	BIBLIOGRAPHY	74
	APPENDICES	75

LIST OF TABLES

NO.	TITLE	PAGE NO.
2.1	Advantages and Disadvantages of TE Technology	18
2.2	Proton Wira's Radiator Specification (Hakimi, 2006)	25
2.3	The Radiator Performance Parameters	27
4.1	Baseline Geometry Description of Automobile Radiator Design	40
4.2	Baseline Working Conditions for New Radiator	40
4.3	Dimension of TEG Module	50
4.4	Combination of Different Dimensions of TEG Module	50
4.5	The Result of Analysis on the Effect of Tolerance	51
5.1	Bill of Materials for Clamp	59
5.2	Bill of Materials for Fully Assembly System	63
6.1	Efficiency Achieved by Figure of Merit	65
A1	Gantt Chart for Final Year Project I Planning	75
A2	Gantt Chart for Final Year Project II Planning	76
C1	Physical Properties of the 19 Watt Module, HZ-20	82
C2	Thermal Properties of the 19 Watt Module, HZ-20	82
C3	Electrical Properties of the 19 Watt Module, HZ-20	82
D1	Thermal Conductivity of Aluminium at 353.15 K	84
D2	Thermal Conductivity of Copper at 353.15 K	84

LIST OF FIGURES

NO.	TITLE	PAGE NO.
1.1	Energy Split in IC Engines	1
1.2	Energy Flow through a Thermoelectric Couple	3
2.1	Schematic Construction of a Typical TEM	8
2.2	Schematic Diagram of TEM	8
2.3	Graph of Efficiency against ZT Value	11
2.4	Quantum Well Superlattice	12
2.5	Quantum Dot Superlattice (MBE) N-type, PbSeTe/PbTe	13
2.6	Superlattice P-type, Bi ₂ TE ₃ /Sb ₂ Te ₃	13
2.7	'Natural' Nanadots N-type, AgSbTe ₂ -PbTe	14
2.8	Fine Grain P-type, Bi ₂ Sb ₂ TE ₃	15
2.9	Nanowire P-type, Si (Health J., 2008)	15
2.10	Nanowire P-type, Si (Yang/Majumdar, 2008)	16
2.11	Schematic Showing Layout of Sub-Section of Integrated TE Cross-Flow Heat Exchanger	17
2.12	Components of Water Cooling System	19
2.13	Open and Closed Positions of a Thermostat	20
2.14	Cross Flow and Down Flow Radiator	23
3.1	Flow Chart of Methodology	28
3.2	Graph of Efficiency against Temperature Difference	35
3.3	Graph of Power against Temperature Difference	36

4.1	Actual Efficiency of Module	47
4.2	Actual Power Produced by Module	49
4.3	Graph of Power Produced against Contact Area	52
5.1	HZ-20 TEG Module	54
5.2	Four Views of TEG Module.	55
5.3	Four Views of Fin	56
5.4	Enlarge Isometric View of Fins Dimension of Radiator	56
5.5	Four Views of Radiator	57
5.6	Four Views of Radiator's Top or Bottom Solid Rectangular Bar	58
5.7	Four Views of the Clamp	59
5.8	Exploded View of the Clamp	59
5.9	Four Views of Central Rods with Spring	60
5.10	Four Views of Spring	60
5.11	Four Views of Bar	61
5.12	Four Views of Side Rod	61
5.13	Four Views of Hexagon Nut	62
5.14	Four View of the Fully Assembly System	63
5.15	Explore View of the Fully Assembly System	63
B1	Graph of Mass Flow Rate against Engine Speed	77
B2	Graph of Temperature Drop across the Tube against Engine Speed	78
B3	Graph of Heat Dissipated Rate against Engine Speed	79
B4	Graph of Heat Dissipated Rate against Temperature Drop	80
C1	HZ-20 Thermoelectric Module	81
C2	Module's Dimension (in Inches)	81
C3	Graph of Power against Temperature Difference	83
C4	Graph of Efficiency against Temperature Difference	84

LIST OF ABBREVIATIONS

ATEG	=	Automotive Thermoelectric Generator
CAD	=	Computer Aided Design
CHAP	=	Chapter
CVD	=	Chemical Vapour Deposition
FYP	=	Final Year Project
IC	=	Internal Combustion
MBE	=	Molecular Beam Epitaxy
MMD	=	Malaysia Meteorological Department
R&D	=	Research and Development
TE	=	Thermoelectric
TEG	=	Thermoelectric Generator
TEM	=	Thermoelectric Material
ZT	=	Merit of Figure

LIST OF SYMBOLS

α	=	Seebeck Coefficient, V/K
A	=	Area, m ²
C_p	=	Specific Heat Coefficient at Constant Pressure, kJ/kg K
k	=	Thermal Conductivity, W/m K
\dot{m}	=	Mass Flow Rate, kg/s
ρ	=	Density, kg/m ³
q	=	Heat Transfer, kJ/s
rpm	=	Revolution per Minute, rev/m
T	=	Temperature, K
ΔT	=	Temperature Different, K
v	=	Velocity, m/s
ΔV	=	Voltage Different, V
\dot{V}	=	Volumetric Flow Rate, m ³ /s
x	=	Thickness, m

LIST OF APPENDICES

APPENDIX	TITLE	PAGE NO.
A	Gantt Charts for Final Year Project Planning	75
B	Radiator Performance Curves	77
	B1 Relationship between the Mass Flow Rate and Engine Speed	77
	B2 Relationship between Temperature Drop and Engine Speed	78
	B3 Relationship between Heat Dissipated Rate and Engine Speed	79
	B4 Relationship between Heat Dissipated Rate and Temperature Drop	80
C	Hz-20 Thermoelectric Module Description	81
	C1 Temperature Dependence	83
D	Interpolation Method to Calculate Thermal Conductivity	84

CHAPTER 1

INTRODUCTION

This research project had been carried out to design a TEG system, which can integrate into radiator of automobile gasoline powered combustion engine to recovery waste heat lose to surrounding.

1.1 Problem Statement

Study on automobiles gasoline powered internal combustion engine shows that only approximate 25% of the fuel energy is used to drive the engine, whereas 40% of the fuel energy is wasted in exhaust gas, 30% in engine coolant and 5% in friction and parasitic losses (refer to Figure 1.1).

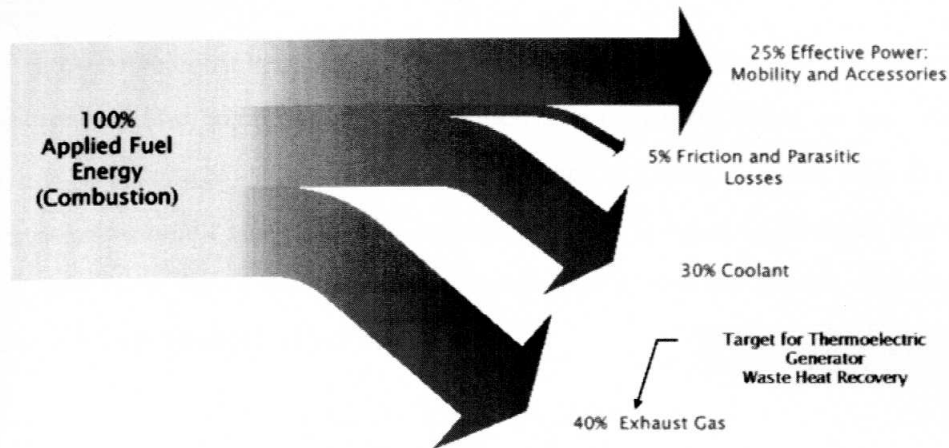


Figure 1.1: Energy Split in IC Engines [2]

For example, a full tank of vehicle capacity is 100 litre fuels, but only 25 litre of fuel is turn into useful mechanical energy to power vehicle, the remaining of 75 litre of fuel is dissipate as heat energy. The petrol price in Malaysia is not stable and subjected to international oil price change. Consequences, the price of 1 litre petrol had increased to RM 2.70 in 5 June 2008. According to this petrol price, one has to pay RM 270 for 100 litres where RM 67.50 pay for the engine to work and RM 202.50 pay for the unwanted heat produce by engine. This is not logic and non economical but this is what vehicle does everyday. Therefore many studies had carried out to recover the waste heat dissipated by vehicle. If the waste heat can recover, not only the every Ringgit spends for fuel is become more valuable, but also can reduce the fuel consumption due to less fuel require to generate electric for vehicle.

As a conclusion, the increasing of oil prices in the world market and low utilization of gasoline powered engine makes it necessary to generate new sustainable sources of electric power in modern automobiles. Furthermore, vehicle nowadays requires more and more electricity energy in order to maintain the communication, navigation, engine control, and safety systems of the vehicle. Therefore TEG is the best solution to recover waste heat through converts the heat energy into electricity. The focus of this research thesis is to design a TEG system which can integrate into the radiator of automobile vehicle to generate electricity.

A thermoelectric generator (TEG) is a device used to convert heat energy into electric power. The basic concept and principle for TEG is based on the “Seebeck effect”, where voltage is produced by temperature difference across two dissimilar legs of semiconductor material. The voltage produced is equal to Seebeck coefficient of the material, α , times the temperature difference across the device. The equation that describes the Seebeck effect is:

$$\Delta V = \alpha(T_{Hot} - T_{Cold})$$

where ΔV = Voltage Produced
 T_{Hot} = Hot side temperature
 T_{Cold} = Cold side temperature

There are two dissimilar legs made of semiconductor material, one is the p-type and the other is n-type. The p- and n- legs are joined by an electrically conducting material at the p-n junction and are called a thermoelectric couple. One TE couple is the fundamental unit of TE module. When a series of p-n couples are connected electrically in series and thermally in parallel, they form a thermoelectric module. The electrical connectors are separated from the heat source and sink by electrically insulating material. Due to temperature difference, the negatively charged electrons in the n-leg and the positively charged holes in the p-leg move from the heat source to the heat sink. This not only produces voltage but also helps to transfer heat energy to the dissipated site. The flow of electrons disturbs the original uniform charge carrier distribution and produces a current flow in the thermoelectric couple against the flow direction of electrons as shown in Figure 1.2.

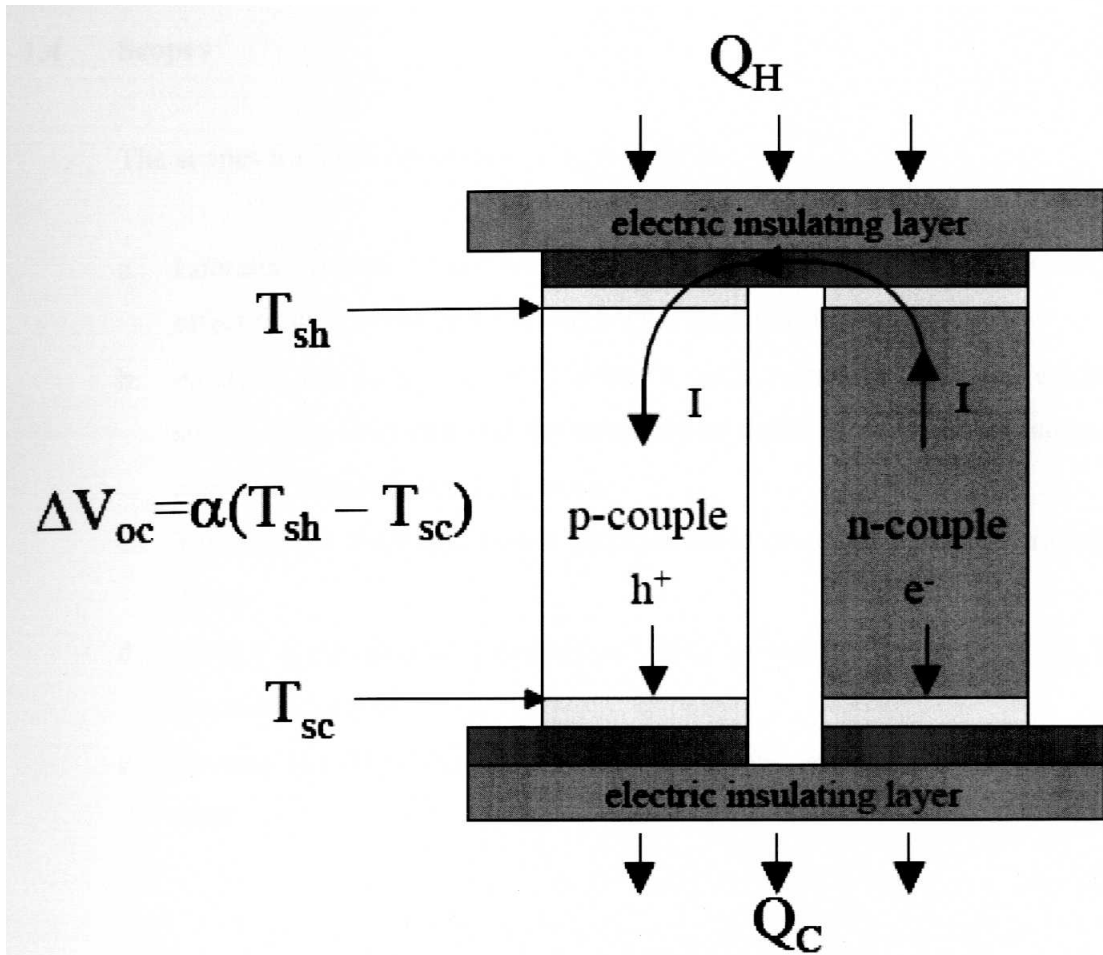


Figure 1.2: Energy Flow through a Thermoelectric Couple [3]

1.3 Objective

The objective of this research project is to produce a conceptual design of TEG for automotive waste heat recovery.

1.4 Scopes

The scopes for TEG conceptual design include:

- a. Literature review on the working principle of the TEG base on Seebeck effect as well as the application of TEG in automotive industry.
- b. Analysis the parameters of radiator's performance such as the engine speed, mass flow rate and the temperature different drop across radiator based on Hakimi's research work.
- c. Tabulate the electricity power produce based on conduction heat transfer theory.
- d. Design a mechanical assembly of TEG in radiator to produce 70 W electricity powers.
- e. Discuss the TEG design and include recommendation for the future work.

1.5 Summary of Thesis

Chapter 1 has stated the problem statement, background, objective, and scopes of TEG design. Then, Chapter 2 is the literature review that summarizes and evaluates the recent or previous works done by researchers in ATEG. Following is the Chapter 3 that describes about the methodology used throughout this research project. The Chapter 4 involved selection of TEG module and radiator design, which includes radiator specification and calculation of theoretical power produce by the new design TEG system. Next, Chapter 5 shows the individual components and assembly drawing of new TEG design. Chapter 6 discusses the issues such as the material, radiator performance and application of TEG design system. Lastly, Chapter 7 finalizes the thesis with the conclusion and recommendations. Reference, Bibliography and Appendix were placed at last of the thesis.

CHAPTER 2

LITERATURE REVIEW

Thermoelectric Generator is a solid state 'heat engine' capable of converting heat to electricity or alternatively capable of converting electricity into cooling. Thermoelectric generators (TEGs) are construct base on the three factors that are source of heat, type of cooling system, and required electric power output. First factor in construct TEG is the sources of heat, which include radioactive materials, fossil fuels, and waste heat. In space applications radioisotope TEGs has been used since 1960s, while fossil fuel powered TEGs has been used in military applications [4]. Waste heat based TEGs on have a varieties range of applications from power plants to transportation and domestic applications. However, only the waste heat TEG in vehicle is discuss in this chapter.

2.1 Waste Heat Recovery

Waste heat recovery captures waste heat energy and reuses it by returning it to systems or processes. This can include heating space and water. The cost benefits of a heat recovery system depend largely on the type and scale of the installation, but heat recovery can give substantial long-term energy savings. It often reduces the need to generate heat in the first place, making further energy and cost savings.

2.2 Automotive Thermoelectric Generator (ATEG)

ATEG is an electrical generator applied the Seebeck effect to recover lost heat in an internal combustion engine powered vehicle. There are two types of ATEG: exhaust-based ATEGs and coolant-based ATEGs [5]. The exhaust-based ATEG converts the heat lost in the IC engine exhaust whereas the coolant-based ATEG converts the heat lost in the engine coolant, into electricity. An ATEG consists of three main components, they are:

- a. Hot-side heat exchanger
- b. Cold-side heat exchanger
- c. Thermoelectric materials (TEMs)

2.2.1 Hot-side Heat Exchanger

The function of hot-side heat exchanger is to extracting waste heat and delivering this heat to the surface of TEM.

2.2.2 Cold-side Heat Exchanger

The cold-side heat exchanger is responsible for dissipating heat from TEM to prevent damage on TEM due to high temperature, refer Figure 2.1 for the schematic configuration of waste heat TEG.